


Soy Processing Analyzer



- Soybean, Soymeal and By-Products
- Moisture, Protein, Fat, Fiber, Starch, Ash, NDF, and Other Parameters in Under 30 Seconds
- Ready to Go Pre-Calibrated with Unity or Ingot® Calibrations from Aunir™

* Deluxe Model

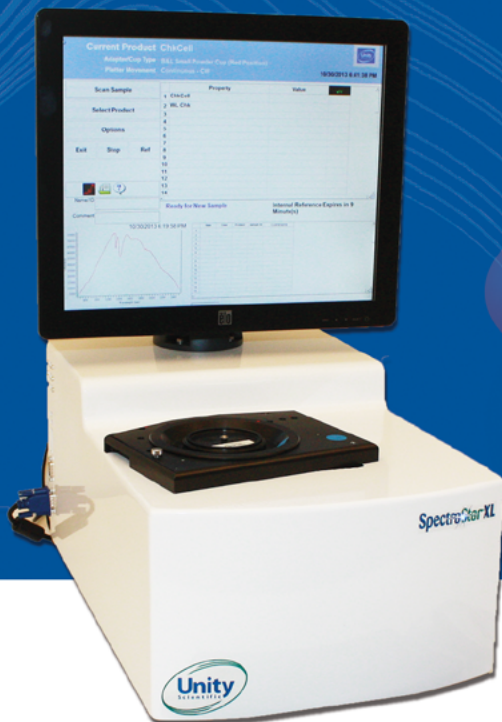


Monitoring incoming soybean quality whole and expeller

Monitoring and controlling extraction process

Residual oil and protein values in soymeal

Feed value of soy hulls and byproducts



Process and Quality Control

Fast, accurate analysis is critical for soybean processors to optimize the oil extraction process and insure quality of the finished products. Optimizing the process will save the plant time and money and provide very rapid payback. Near Infrared (NIR) analysis is a proven technique designed to provide fast, accurate, and reliable results for the oil seed processing industry.

SpectraStar XL

The Soy Processing Analyzer is based on the SpectraStar XL, a state of the art stand-alone NIR analyzer optimized for the analysis of ground and unground natural products. The SpectraStar XL is calibrated to NIST traceable reference standard materials and utilizes TRUE NIR™ components for outstanding performance and reliability, providing high uptime, complete confidence and quick payback to the operators.

The Unity Scientific SpectraStar™ RTW (Rotating Top Window) system gives the ultimate in sampling flexibility and allows the customer to make measurements of all important soybean processing steps.

Plug and Go Calibrations

The Basic Soy Analyzer comes ready to use with Unity calibrations for protein, moisture and fat in soybean, flake and soymeal and includes 1 year calibration support.

The Deluxe Soy Analyzer is powered by the Ingot® calibration package from Aunir™, a world leader in NIR calibrations for over 30 years. This package includes a full suite of calibrations for protein, fat, moisture, fibers, starch and ash. With calibrations for soybeans, flake, soymeal and hulls, the Ingot calibration package covers all products and by-products in the plant. All Ingot calibrations are backed by Aunir's 30 years of experience and include 1 year calibration support and guarantee from Aunir.

BENEFITS

- Rapid payback
- At-line ready
- Simple to use
- Flexible sample handling
- Easy data integration
- Low maintenance
- ISO 12099 Compliant
- Guaranteed calibrations



SpectraStar XL

Soybean Processing Analyzer

How to Order

Simply choose the calibration package most suited to your requirements

Soy Analyzer Basic

US-2500-SOY1
SpectraStar 2500 XL
(1100 nm – 2500 nm)
Unity calibrations

Soy Analyzer Deluxe

US-2500-SOY2
SpectraStar 2500 XL
(1100 nm – 2500 nm)
Ingot® calibrations

Ready to Use

The Unity Soybean Processing Analyzer is robust enough to be used both at-line or in the lab. The system features a long life lamp and no air filter or fan, providing for very low cost of ownership. The built in computer is fully networkable and LIMS compatible, allowing for plant management to immediately access results. The Soybean Analyzer is a valuable tool to control every step in the soybean processing plant from incoming expeller to soymeal export certificate of analysis.

Both Soy Processing Analyzer package includes the following:

- SpectraStar 2500 XL (1100 nm - 2500 nm) with built in 17" touch screen prediction software, multi-cup adapter, US-RTIR-0016 adapter ring, Unity check cell, Unity R99 standard.
- 2 Sample cup US-LGOP-0001 for analysis of ground soybeans, soymeal and hulls

The **Soy Analyzer Basic** package includes:

- Unity calibrations for soybeans, soymeal and by-products
- 1 year free calibration support

The **Soy Analyzer Deluxe** package includes:

- Full Ingot Calibration package for soybeans, soymeal and by-products
- 1 year calibration support and guarantee from Aunir™



Specifications (Full Specifications in SpectraStar XL Brochure)

Technology	Pre-dispersive scanning monochromator with nominal bandwidth of 10 nm (FWHM)
Wavelength Range	1100 - 2500 nm
Light Source	Tungsten halogen lamp with MTBF rating of 10,000 hours (User changeable)
Detector	Custom dual cooled, extended InGaAs detectors (2)
Analysis Time	10 - 30 seconds
Data Interval	1.0 nm
Photometric Noise	< 0.02 mAu 1100 - 2500 nm

User Interface

Built-in Computer	Windows® 7 Professional, Solid State HDD, 17" high resolution touch screen monitor
Software	InfoStar™ prediction and data management package
Network Capabilities	OPC Compliant; LIMS Compatible; 5 USB ports, 2 Ethernet (RJ45)

Dimensions and Power Requirements

Size	330 x 381 x 508 mm (with display) 330 x 381 x 270 mm (without display)
Weight	18 kg, 40 lbs.; 22 kg, 48 lbs. with monitor
Voltage	100-240 V AC *, frequency 50-60 Hz, Class 1, protective earth



Unity Scientific

117 Old State Road
Brookfield, CT 06804
USA

Phone: 203-740-2999
Fax: 203-740-2955
www.unityscientific.com
Email: info@unityscientific.com

Local Contact Information: